MASSLOAD
財榮壓鑄股份有限公司

CI-708

Outdoor ANPR Enclosure

Engineered for High-Performance Imaging.



A premium die-cast aluminum enclosure built for professional camera systems, including global shutter applications. Featuring IP68, IK10 and NEMA 4X protection, it delivers exceptional durability and reliability for demanding outdoor and industrial environments.


Certificated: IP68 – RoHS – IK10 – CE – FCC – NEMA-4X

Technical Specifications

Viewing Window	Tempered Glass
Body Construction	Die - Casting Aluminum
Sunshade	Adjustable Aluminum construction
Coating	Black Powder-Coated Body / Silver-Grey Sunshield
Cable Entry	IP68 cable glands
IR Illuminator	30°/ 30M or Pulsed model for Global Shutter Application
Heater (Optional)	10W or 20W
Fan (Optional)	12VDC, 1.8W
NVIDIA Carrier Board (Optional)	With MIPI CSI-2, GPIO and Multiple I/O Interfaces

Operating Temperature (With Heaters)	-60°C ~ 70°C
External Dimensions	L 307 mm x W 310 mm x H 163 mm
Internal space for camera	L 180 mm x W 200 mm x H 90 mm
Weight (Without Bracket)	Approx. 5 KGS

Dimensions

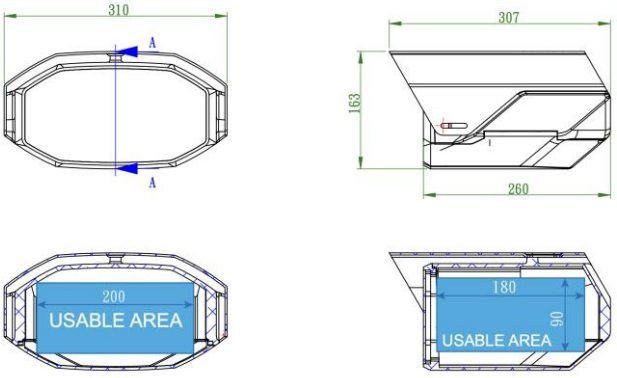

Product views



www.massload.com.tw